

23AWG CAT6A DJ/UTP OUTDOOR SERIES

TMT Global cat6 23awg 4 twisted pair DJ-UTP Outdoor Network Cable 305m are Manufactured Tested and Complied with IEC 60332-1-2 EN 50173-1:2011 ISO/IEC11801:2011(Ed. 2.2) ANSI/TIA/EIA-568.2-D IEC61935-2:2010(Ed.3.0) EN 50173-2:2007 including Amendment A1:2010 Requirements for Patch Cord Assemblies and Provide High Performance levels for structured cabling systems.

General Specification:

4 Pairs UnShielded Twisted Pair (DJUTP) Cable

Gold Plated: 30U"

Color Code: Aqua/Black/Blue/green/Grey/Orange/Red/Violet/White/Yellow r custom color

Length : 0.12/0.15/0.50/1/2/3/5/8/10/15/20/25/30/40/50/70/100/meter r custom Length

Contact blade: Phosphor Bronze

Insulation Material: HD-PE-PVC-LSZH

Jacket Material: PVC UL94V-0

APPLICATION

10BASE-T, 100BASE-TX Fast Ethernet,

1000BASE-T (IEEE802.3

100VG-AnyLAN (IEEE802.12)

550 MHz Broadband Video

Voice, T1, ISDN

155/ 622 Mbps ATM

Power over Ethernet (POE)

PHYSICAL AND MECHANICAL PROPERTIES

Conductor Resistance: $\leq 5\Omega - \leq 20\Omega$

Insulation Resistance: $\geq 10M\Omega$

Characteristic Impedance: 100 — 6 Ohm @ 1-250MHz -1-500 MHz

Contact Resistance: 20 m Ohm max

Resistance Unbalance: 2% max

Dielectric strength: 1000 volts/1 minute min rms

Cable to Plug Tensile Strength: 9 Kgf (90N) min


Durability: 750

Temperature Operating Range: -25°C to 70°C

Country Of Origin: Made in UAE

By Fahad Cables Industry FZE

CAT6A DJ/UTP OUTDOOR SERIES

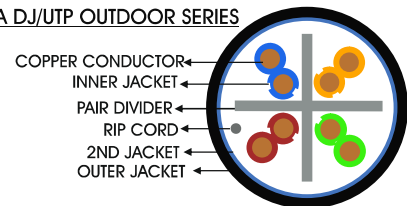

Middle East Office

TMT GLOBAL TECHNOLOGY

Mob: +971-54-7069701

Email: info@tmtuae.com

Web: www.tmtuae.com

Location: Maliha Road Industrial Area 18
Showroom 2 Sharjah (United Arab emirates)

UK Office

TMT GLOBAL TECHNOLOGY LTD (UK)

Company no: 07187773

Email: info@tmtglobal.co.uk

Web: www.tmtglobal.co.uk

Location: 120 Baker Street, 3rd Floor, London,
England, W1U 6TU, United Kingdom

23AWG CAT6A DJ/UTP OUTDOOR SERIES

TMT Global cat6 23awg 4 twisted pair DJ-UTP Outdoor Network Cable 305m are Manufactured Tested and Complied with IEC 60332-1-2 EN 50173-1:2011 ISO/IEC11801:2011(Ed. 2.2) ANSI/TIA/EIA-568.2-D IEC61935-2:2010(Ed.3.0) EN 50173-2:2007 including Amendment A1:2010 Requirements for Patch Cord Assemblies and Provide High Performance levels for structured cabling systems.

PHYSICAL AND MECHANICAL PROPERTIES	
Basic Conductor	TMT copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Outer Jacket 1	PVC
Outer Jacket 2	Heavy-duty, black, UV-resistant PE compound for Indoor /outdoor use. Color : (Black)
Standard Surface Marking	Includes TMT GLOBAL , cable description, Meter mark and MODEL NO,
Pulling force	110 N max
Short Term Bend Radius	6xOD (mm)
Storage Temperature	-20 to +80C
Temperature operating range	-20 to +60C
Installation temperature range	0 to +50C

ELECTRICAL SPECIFICATIONS			
Characteristic Impedance	100—6 Ohm @ 1-500 MHz	Dielectric strength	1500 Volts/1 minute min RMS
Loop Resistance	25	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay Skew	534 + 36/vf. nS/100m max @ 1-500 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Insulation Resistance	45 nS/100m max @ 1-500 MHz
Cap. Unbalance (wire to ground)	1500 pF/Km max. @ 1 KHz.	Coupling attenuation	85 dB min @ 30-100 MHz 55-20Log(f/100) @100-500 MHz
Voltage rating	72 Vdc max.	Transfer Impedance	50 mOhm/m max @ 1 MHz. 100 mOhm/m max @ 10 MHz. 200 mOhm/m max @ 30 MHz. 1000 mOhm/m max @ 100 MHz.

Ordering Information		
Model Series	Item Code	Description
TMT-4066	6A136MDK	23AWG 4PAIR CAT6A DJ/UTP INDOOR/OUTDOOR CABLE 305M

Middle East Office
TMT GLOBAL TECHNOLOGY
Mob:+971-54-7069701
Email: info@tmtuae.com
Web: www.tmtuae.com
Location: Maliha Road Industrial Area 18
Showroom 2 Sharjah (United Arab emirates)

UK Office
TMT GLOBAL TECHNOLOGY LTD (UK)
Company no:07187773
Email: info@tmtglobal.co.uk
Web: www.tmtglobal.co.uk
Location: 120 Baker Street, 3rd Floor, London,
England, W1U 6TU , United Kingdom

