



KEYSTONE JACK SERIES



KEYSTONE JACK SERIES

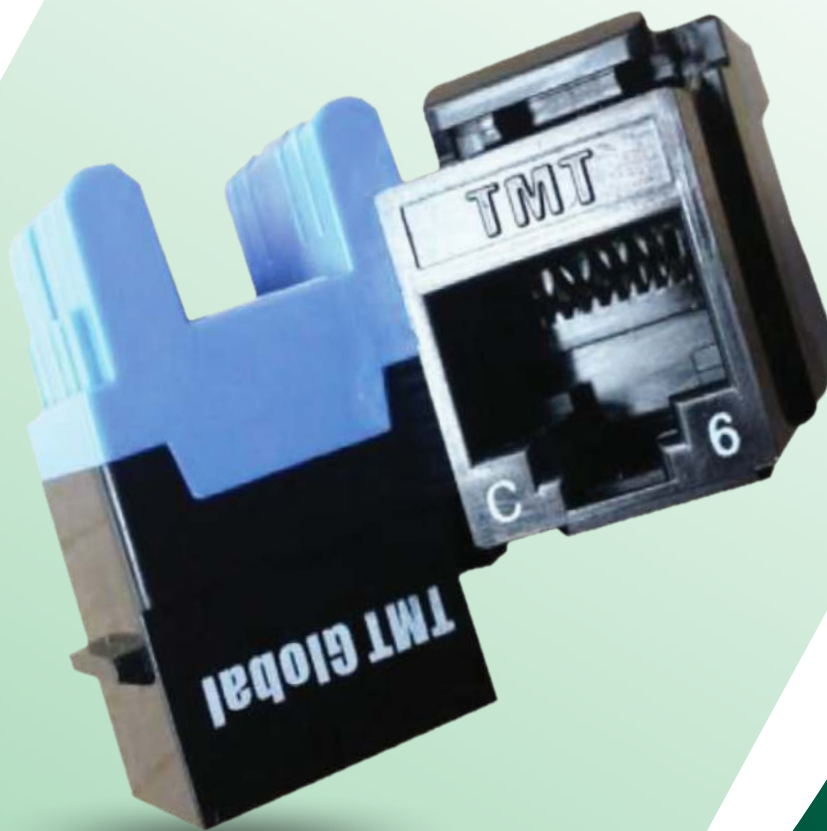

KEYSTONE SERIES

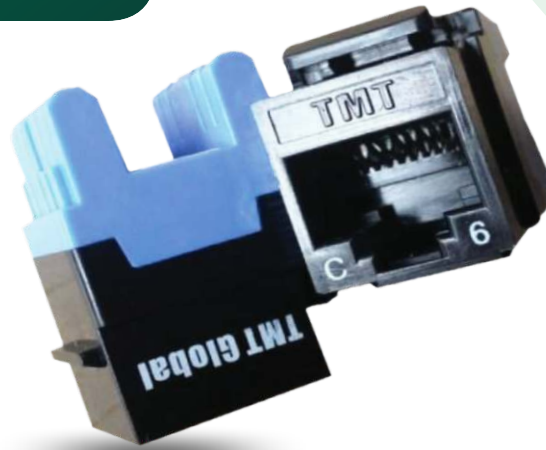

CAT6 180° Keystone Jack

TMT GLOBAL Cat.6 180° Jacks are designed and manufactured to meet the 10 Gigabit transmission requirements. The Jacks snap easily in and out of wall outlets, surface mount boxes and patch panels. These comply with TIA/EIA-568-C.2 specifications.

TMT Global Category 6 tool less U/UTP keystone Jacks give optimum protection from electromagnetic interference from an outside source. The tool-less termination allows all eight conductors to be terminated simultaneously when the termination cap is pressed into place. These Jacks are designed to reduce the Insertion loss & alien cross talk in order to

Features

- RJ45 8P 8C 180C 50u Punch Down Jack
- Terminating 4 pairs, 22-26 AWG Cable
- Universal labels color coded for T568A and T568B wiring schemes
- Fitting high density keystone panel
- UL, ETL, RoHS certified
- IDC contacts that allows re-termination without damaging the unit

PHYSICAL AND MECHANICAL PROPERTIES

Housing	High-impact Flame Retardant Polycarbonate, UL94V-0	Contact resistance	$\leq 20 \text{ m}\Omega$
Spring Wire	Phosphor Bronze With Gold-plated 3u-50u	DC Resistance	0.1 ohm MAX
Dielectric Withstand Volt	100VAC RMS 60Hz	Voltage	150 VAC MAX
IDC Contact	Phosphor Bronze	IDC insertion life	250 times(min.)
Plug insertion Life	≥ 1000 mating cycles	IDC	22-26AWG
Operating Temperature Range	-60: to 80:	Gold plating	3 μ "
IDC Accept	22-26 AWG	Plug Retention Force	89N
Wire Scheme	T568A/B	Insulation Resistance	5000 Ω
Current Rating	1.5A	Withstanding Voltage	1000 VAC RMS @ 60Hz / 1 min

Ordering Information

Model No	Product ID	Description
TMT-4301	TMT-06UBP2	CAT6 UTP KEYSTONE JACK 180:



KEYSTONE SERIES



KEYSTONE SERIES



KEYSTONE SERIES



CAT6 180° Keystone Jack

TMT GLOBAL Cat.6 180° Jacks are designed and manufactured to meet the 10 Gigabit transmission requirements. The Jacks snap easily in and out of wall outlets, surface mount boxes and patch panels. These comply with TIA/EIA-568-C.2 specifications.

TMT Global Category 6 tool less U/UTP keystone Jacks give optimum protection from electromagnetic interference from an outside source. The tool-less termination allows all eight conductors to be terminated simultaneously when the termination cap is pressed into place. These Jacks are designed to reduce the Insertion loss & alien cross talk in order to

Features

- RJ45 8P 8C 180° 50u Punch Down Jack
- Terminating 4 pairs, 22-26 AWG Cable
- Universal labels color coded for T568A and T568B wiring schemes
- Fitting high density keystone panel
- UL, ETL, RoHS certified
- IDC contacts that allows re-termination without damaging the unit

PHYSICAL AND MECHANICAL PROPERTIES

Housing	High-impact Flame Retardant Polycarbonate, UL94V-0	Contact resistance	<= 20 mΩ
Spring Wire	Phosphor Bronze With Gold-plated 3u-50u	DC Resistance	0.1 ohm MAX
Dielectric Withstand Volt	100VAC RMS 60Hz	Voltage	150 VAC MAX
IDC Contact	Phosphor Bronze	IDC insertion life	250 times(min.)
Plug insertion Life	≥1000 mating cycles	IDC	22-26AWG
Operating Temperature Range	-60: to 80:	Gold plating	3 μ"
IDC Accept	22-26 AWG	Plug Retention Force	89N
Wire Scheme	T568A/B	Insulation Resistance	500Ω
Current Rating	1.5A	Withstanding Voltage	1000 VAC RMS @ 60Hz / 1 min

Ordering Information

Model No	Product ID	Description
TMT-4312	TMT-06UBP1	CAT6 UTP KEYSTONE JACK 180: TOOLS LESS



KEYSTONE SERIES



KEYSTONE SERIES



KEYSTONE SERIES



CAT6 180° Keystone Jack

TMT GLOBAL Cat.6 180° Jacks are designed and manufactured to meet the 10 Gigabit transmission requirements. The Jacks snap easily in and out of wall outlets, surface mount boxes and patch panels. These comply with TIA/EIA-568-C.2 specifications.

TMT Global Category 6 tool less U/UTP keystone Jacks give optimum protection from electromagnetic interference from an outside source. The tool-less termination allows all eight conductors to be terminated simultaneously when the termination cap is pressed into place. These Jacks are designed to reduce the Insertion loss & alien cross talk in order to

Features

- RJ45 8P 8C 180C 50u Punch Down Jack
- Terminating 4 pairs, 22-26 AWG Cable
- Universal labels color coded for T568A and T568B wiring schemes
- Fitting high density keystone panel
- UL, ETL, RoHS certified
- IDC contacts that allows re-termination without damaging the unit

PHYSICAL AND MECHANICAL PROPERTIES

Housing	High-impact Flame Retardant Polycarbonate, UL94V-0	Contact resistance	<= 20 mΩ
Spring Wire	Phosphor Bronze With Gold-plated 3u-50u	DC Resistance	0.1 ohm MAX
Dielectric Withstand Volt	100VAC RMS 60Hz	Voltage	150 VAC MAX
IDC Contact	Phosphor Bronze	IDC insertion life	250 times(min.)
Plug insertion Life	≥1000 mating cycles	IDC	22-26AWG
Operating Temperature Range	-60: to 80:	Gold plating	3 μ"
IDC Accept	22-26 AWG	Plug Retention Force	89N
Wire Scheme	T568A/B	Insulation Resistance	500Ω
Current Rating	1.5A	Withstanding Voltage	1000 VAC RMS @ 60Hz / 1 min

Ordering Information

Model No	Product ID	Description
TMT-4322	TMT-06UCP2	CAT6 UTP KEYSTONE JACK FLOOR MOUNTED



KEYSTONE SERIES



KEYSTONE SERIES



KEYSTONE SERIES



CAT6A 180° Keystone Jack

TMT GLOBAL Cat.6A 180° Jacks are designed and manufactured to meet the 10 Gigabit transmission requirements. The Jacks snap easily in and out of wall outlets, surface mount boxes and patch panels. These comply with TIA/EIA-568-C.2 specifications.

TMT Global Category 6A tool less U/UTP keystone Jacks give optimum protection from electromagnetic interference from an outside source. The tool-less termination allows all eight conductors to be terminated simultaneously when the termination cap is pressed into place. These Jacks are designed to reduce the Insertion loss & alien cross talk in order to

Features

- RJ45 8P 8C 180° 50u Punch Down Jack
- Terminating 4 pairs, 22-26 AWG Cable
- Universal labels color coded for T568A and T568B wiring schemes
- Fitting high density keystone panel
- UL, ETL, RoHS certified
- Two types of tools can be used for termination: 110 and Krone Type
- IDC contacts that allows re-termination without damaging the unit

Specifications

Housing	High-impact Flame Retardant Polycarbonate, UL94V-0	Contact resistance	20M.Ω
Spring Wire	Phosphor Bronze With Gold-plated 3u-50u	Data trans rate	UP to 500Mbps
IDC Contact	Phosphor Bronze	Dielectric Withstand Voltage	1,000VAC RMS@60Hz (1 Minute)
Insertion life	≥1000 mating cycles	DC Resistance	0.1 ohm MAX
Operating Temperature Range	-600 to 800	Voltage	150 VAC MAX
IDC Accept	22-26 AWG	IDC insertion life	250 times(min.)
Wire Scheme	T568A/B	IDC	22-26AWG
Insulation Resistance	500Ω	Gold plating	3 μ"
Current Rating	1.5Amps	Plug insertion force	17kg(min)

Ordering Information

Model No	Product ID	Description
TMT-4330	TMT-06ABP1	CAT6A UTP KEYSTONE JACK 180: TOOLS LESS



KEYSTONE SERIES



KEYSTONE SERIES



KEYSTONE SERIES



CAT6A 180° S/FTP Keystone Jack

TMT GLOBAL Cat.6A S/FTP 180° Jacks are designed and manufactured to meet the 10 Gigabit transmission requirements. The Jacks snap easily in and out of wall outlets, surface mount boxes and patch panels. These comply with TIA/EIA-568-C.2 specifications.

TMT Global Category 6A tool less U/UTP keystone Jacks give optimum protection from electromagnetic interference from an outside source. The tool-less termination allows all eight conductors to be terminated simultaneously when the termination cap is pressed into place. These Jacks are designed to reduce the Insertion loss & alien cross talk in order to

Features

- RJ45 8P 8C 180° 50u Punch Down Jack
- Terminating 4 pairs, 22-26 AWG Cable
- Universal labels color coded for T568A and T568B wiring schemes
- Fitting high density keystone panel
- UL, ETL, RoHS certified
- Two types of tools can be used for termination: 110 and Krone Type
- IDC contacts that allows re-termination without damaging the unit

Specifications	
Material	UL-94V0 PC
Insulation resistance	500M.Ω
Contact resistance	20M.Ω
Current rating	1.5A
DC resistance	Max 0.1Ω
Data trans rate	UP to 500Mbps
Dielectric Withstand Voltage	1,000VAC RMS@60Hz (1 Minute)
Plug insertion life	1000 times(min.)
IDC insertion life	250 times(min.)
IDC	22-26AWG
Gold plating	3 μ"
Plug insertion force	17kg(min)

Ordering Information		
Model No	Product ID	Description
TMT-4340	TMT-6ASBS1	CAT6A STP KEYSTONE JACK 180: TOOLS LESS

