


DATA PATCH PANEL SERIES



DATA PATCH PANEL SERIES



PATCH PANEL SERIES

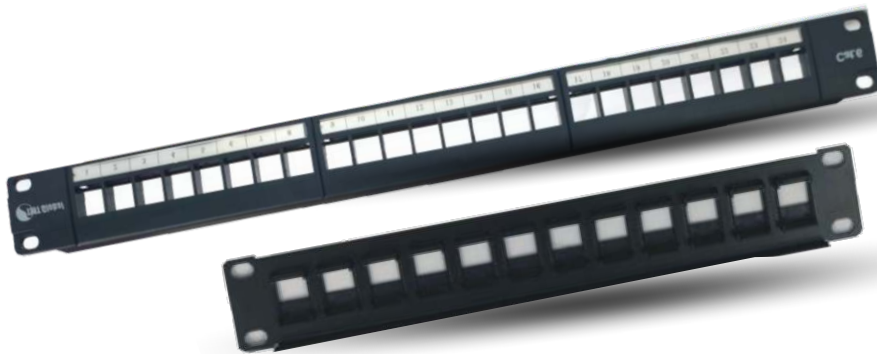

12/24 PORT CAT6/CAT6A PATCH PANEL

FEATURES

- Exceptional material properties and design
- Integrated full installation accessories (supplied free of charge), including labels and icons, clip organizers and T-raps- providing a simple and elegant cable termination and identification.
- Optional plastic front panels
- Exceeding Category 6 performance - providing full support to Gigabit Ethernet over Category 5e and Category 6 cabling systems.
- High quality metal casing
- Compatible with 24-22 AWG solid conductors
- Available in T568A, T568B or Universal pin/pair assignment

PHYSICAL AND MECHANICAL PROPERTIES

Type	CAT6 UTP	CAT6A FTP
Wire size range	22 to 26 AWG, Solid or stranded Cables	22 to 26 AWG, Solid or stranded Cables
Material of construction	Galvanized Steel	SPCC
Standard Color	Black/Grey	Black/Grey
Connector module holder	High impact, Flame-retardant plastic compound, UL 94 V-0	High impact, Flame-retardant plastic compound, UL 94 V-0
Housing material	High impact, Flame-retardant plastic compound, UL 94 V-0	High impact, Flame-retardant plastic compound, UL 94 V-0
Storage temperature range	-20 to +80C	-20 to +80C
Temperature operating range	-40 to +60C	-40 to +60C
Packaging	One unit per box	One unit per box

Ordering Information

Model No	Product ID	Description
TMT-4352	TMT-0212U	12PORT CAT6 UNLOADED PATCH PANEL
TMT-4364	TMT-0224U	24PORT CAT6 UNLOADED PATCH PANEL
TMT-4374	TMT-0324U	24PORT CAT6A UNLOADED PATCH PANEL

