


DOOR LOCK SERIES

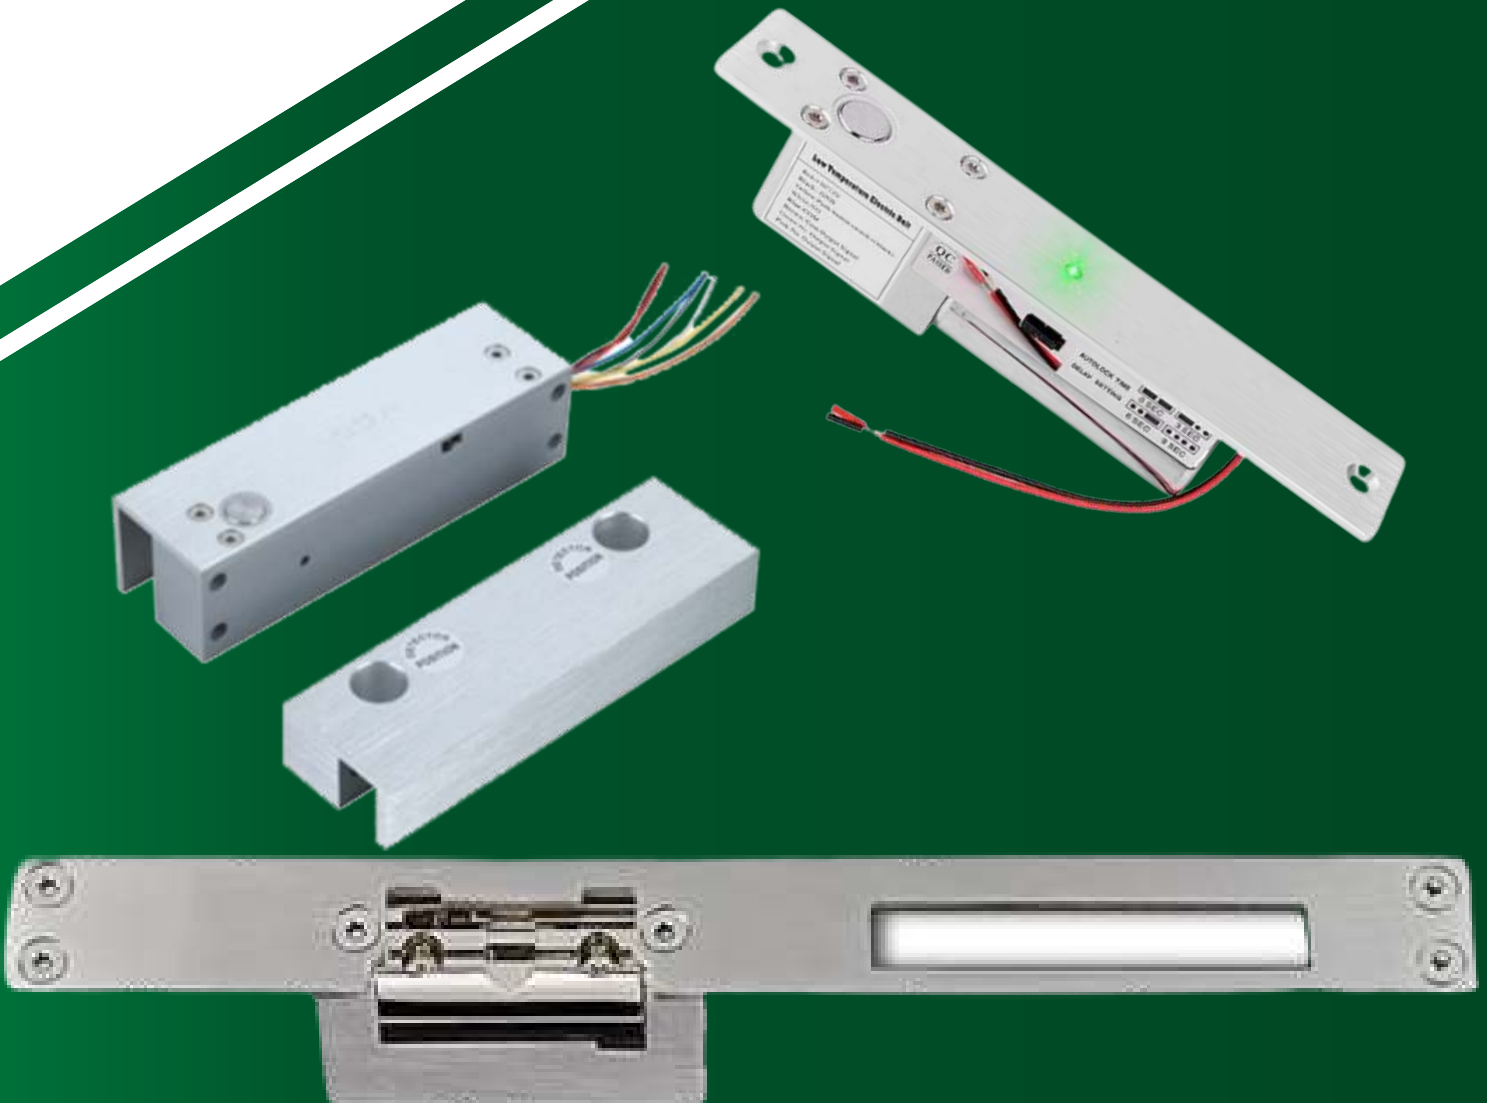

Specification	
Voltage:	DC12V
Start Current	900mA
Standby Current	150mA
Fail Safe	power to lock
Face Plate	205Lx35Wx41H(mm)
Strike plate	90Lx25Wx2W(mm)
Bolt	16mmDIA, stainless steel 16mm throw
Solid Bolt	polishing housing
Holding Force	800KG
Suitable For	Wooden Door, Glass Door, Metal Door, Glass Door
Surface Temp	Low Temperature
Induction Distance	8mm
Door lock delay time	0/ 3/ 6/ 9 seconds available to set
Signal Output	Door status Out put, NC/COM
Operating temp	-10~+25°C (14-131F)
Operating Humidity	0~90%(non-condensing)
Special Designed	Tested to 500000 cycles
Face place material	High Aluminum, Carrulous Line Finished
Weight	0.7kg
Standard Packing	30pcs

ORDER INFORMATION	
Model No	Description
TMT-7664	ELECTRIC BOLT LOCK

Specification	
Lock Size	250Lx25Wx31H(mm)
Strike Structure	Stainless Steel
Holding Force	800kg
Voltage	DC12V
Current	450mA(ES-110A) 200mA(ES-110B)
Surface Temperature	Within +20°C
Suitable Temperature	10~+25°C(14-131F)
Face plate Housing	Painted Steel
Function	Built-out MOV
Suitable For	Wooden Door, Metal Door, PVC Door
Opening Mode	90 Degree Swinging Door
Weight	0.4kg

ORDER INFORMATION	
Model No	Description
TMT-7667	ELECTRIC STRIKE LOCK

Specification	
Lock size	150Lx42Wx37H(mm)
Magnet plate size	150Lx42Wx20H(mm)
Lock pin	12mmDIA, stainless steel 15mm throw
Voltage	DC12V
Start Current	1.1A
Standby Current	0.15A
Solid lock pin	Polishing housing, 1000Kg Holding Force
Suitable For	Non- frame glass door
Signal Output	1...Door Status sensor, NO/COM,
Auto relock jumper	Adjustable (0, 3, 6, 9S)
Surface Temp	Low Temperature
Induction Distance	8mm
Operating temp	14-131F
Operating Humidity	0~90%(non-condensing)
Face place material	High Aluminum,
Lock Weight	0.7kg
Carton size	53Lx30Wx14H(cm)

ORDER INFORMATION	
Model No	Description
TMT-7665	ELECTRIC BOLT GLASS LOCK

