

## CAT6 FLAT F/UTP SERIES

### CAT6 F/UTP 23 AWG 4 Pair Network Elevator Flat Cable

**Standards :** ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair F-UTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this Elevator Flat cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

#### ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

#### PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Screening	Polyester-aluminum tape (foil face inward) providing 100% coverage.
Outer Jacket	Elastic PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	6xOD (mm)
Storage Temperature	-20 to +80C
Temperature operating range	-20 to +60C
Installation temperature range	0 to +50C
Flame Test	IEC 60332-1

#### Ordering Information

Model No Series	Item Code	Description
TMT-7401	6X235BEB	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLUE
	6X235BEG	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GRAY
	6X235BEK	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLACK
	6X235BEN	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GREEN
	6X235BEO	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - ORANGE
	6X235BER	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - RED
	6X235BEV	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - VIOLET
	6X235BEW	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - WHITE
	6X235BEY	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - YELLOW
	6X235BEA	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - AQUA



## CAT6 FLAT F/UTP SERIES

### CAT6 F/UTP 23 AWG 4 Pair Network Elevator Flat Cable

**Standards :** ANSI/TIA/568.2-D CENELEC EN 50288-5 IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair F-UTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this Elevator Flat cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

#### ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

#### PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Screening	Polyester-aluminum tape (foil face inward) providing 100% coverage.
Outer Jacket	Elastic PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	6xOD (mm)
Storage Temperature	-20 to +80C
Temperature operating range	-20 to +60C
Installation temperature range	0 to +50C
Flame Test	IEC 60332-1

#### Ordering Information

Model No Series	Item Code	Description
TMT-7401	6X235BEB	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLUE
	6X235BEG	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GRAY
	6X235BEK	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLACK
	6X235BEN	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GREEN
	6X235BEO	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - ORANGE
	6X235BER	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - RED
	6X235BEV	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - VIOLET
	6X235BEW	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - WHITE
	6X235BEY	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - YELLOW
	6X235BEA	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - AQUA

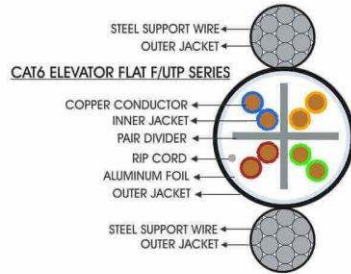

## CAT6 FLAT F/UTP SERIES

### CAT6 F/UTP 23 AWG 4 Pair Network Elevator Flat Cable

**Standards :** ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair F-UTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this Elevator Flat cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

#### ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

#### PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Screening	Polyester-aluminum tape (foil face inward) providing 100% coverage.
Outer Jacket	Elastic PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	6xOD (mm)
Storage Temperature	-20 to +80C
Temperature operating range	-20 to +60C
Installation temperature range	0 to +50C
Flame Test	IEC 60332-1

#### Ordering Information

Model No Series	Item Code	Description
TMT-7401	6X235BEB	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLUE
	6X235BEG	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GRAY
	6X235BEK	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLACK
	6X235BEN	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GREEN
	6X235BEO	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - ORANGE
	6X235BER	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - RED
	6X235BEV	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - VIOLET
	6X235BEW	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - WHITE
	6X235BEY	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - YELLOW
	6X235BEA	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - AQUA

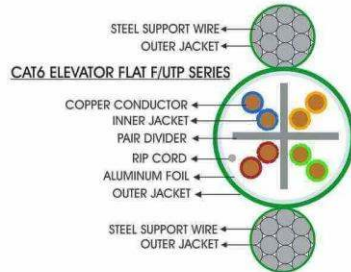

## CAT6 FLAT F/UTP SERIES

### CAT6 F/UTP 23 AWG 4 Pair Network Elevator Flat Cable

**Standards :** ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair F-UTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this Elevator Flat cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

#### ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

#### PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Screening	Polyester-aluminum tape (foil face inward) providing 100% coverage.
Outer Jacket	Elastic PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	6xOD (mm)
Storage Temperature	-20 to +80C
Temperature operating range	-20 to +60C
Installation temperature range	0 to +50C
Flame Test	IEC 60332-1

#### Ordering Information

Model No Series	Item Code	Description
TMT-7401	6X235BEB	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLUE
	6X235BEG	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GRAY
	6X235BEK	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLACK
	6X235BEN	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GREEN
	6X235BEO	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - ORANGE
	6X235BER	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - RED
	6X235BEV	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - VIOLET
	6X235BEW	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - WHITE
	6X235BEY	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - YELLOW
	6X235BEA	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - AQUA

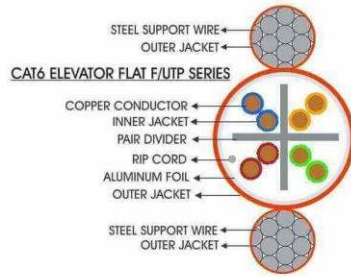

## CAT6 FLAT F/UTP SERIES

### CAT6 F/UTP 23 AWG 4 Pair Network Elevator Flat Cable

**Standards :** ANSI/TIA/568.2-D CENELEC EN 50288-5 IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair F-UTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this Elevator Flat cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

#### ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

#### PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Screening	Polyester-aluminum tape (foil face inward) providing 100% coverage.
Outer Jacket	Elastic PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	6xOD (mm)
Storage Temperature	-20 to +80C
Temperature operating range	-20 to +60C
Installation temperature range	0 to +50C
Flame Test	IEC 60332-1

#### Ordering Information

Model No Series	Item Code	Description
TMT-7401	6X235BEB	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLUE
	6X235BEG	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GRAY
	6X235BEK	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLACK
	6X235BEN	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GREEN
	6X235BEO	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - ORANGE
	6X235BER	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - RED
	6X235BEV	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - VIOLET
	6X235BEW	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - WHITE
	6X235BEY	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - YELLOW
	6X235BEA	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - AQUA

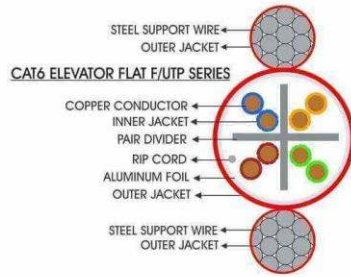

## CAT6 FLAT F/UTP SERIES

### CAT6 F/UTP 23 AWG 4 Pair Network Elevator Flat Cable

**Standards :** ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair F-UTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this Elevator Flat cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

#### ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

#### PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Screening	Polyester-aluminum tape (foil face inward) providing 100% coverage.
Outer Jacket	Elastic PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	6xOD (mm)
Storage Temperature	-20 to +80C
Temperature operating range	-20 to +60C
Installation temperature range	0 to +50C
Flame Test	IEC 60332-1

#### Ordering Information

Model No Series	Item Code	Description
TMT-7401	6X235BEB	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLUE
	6X235BEG	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GRAY
	6X235BEK	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLACK
	6X235BEN	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GREEN
	6X235BEO	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - ORANGE
	6X235BER	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - RED
	6X235BEV	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - VIOLET
	6X235BEW	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - WHITE
	6X235BEY	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - YELLOW
	6X235BEA	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - AQUA



## CAT6 FLAT F/UTP SERIES

### CAT6 F/UTP 23 AWG 4 Pair Network Elevator Flat Cable

**Standards :** ANSI/TIA/568.2-D CENELEC EN 50288-5 IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair F-UTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this Elevator Flat cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

#### ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

#### PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Screening	Polyester-aluminum tape (foil face inward) providing 100% coverage.
Outer Jacket	Elastic PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	6xOD (mm)
Storage Temperature	-20 to +80C
Temperature operating range	-20 to +60C
Installation temperature range	0 to +50C
Flame Test	IEC 60332-1

#### Ordering Information

Model No Series	Item Code	Description
TMT-7401	6X235BEB	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLUE
	6X235BEG	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GRAY
	6X235BEK	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLACK
	6X235BEN	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GREEN
	6X235BEO	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - ORANGE
	6X235BER	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - RED
	6X235BEV	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - VIOLET
	6X235BEW	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - WHITE
	6X235BEY	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - YELLOW
	6X235BEA	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - AQUA



## CAT6 FLAT F/UTP SERIES

### CAT6 F/UTP 23 AWG 4 Pair Network Elevator Flat Cable

**Standards :** ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair F-UTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this Elevator Flat cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

#### ELECTRICAL SPECIFICATIONS

Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms


#### PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Screening	Polyester-aluminum tape (foil face inward) providing 100% coverage.
Outer Jacket	Elastic PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	6xOD (mm)
Storage Temperature	-20 to +80C
Temperature operating range	-20 to +60C
Installation temperature range	0 to +50C
Flame Test	IEC 60332-1

#### Ordering Information

Model No Series	Item Code	Description
TMT-7401	6X235BEB	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLUE
	6X235BEG	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GRAY
	6X235BEK	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLACK
	6X235BEN	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GREEN
	6X235BEO	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - ORANGE
	6X235BER	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - RED
	6X235BEV	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - VIOLET
	6X235BEW	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - WHITE
	6X235BEY	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - YELLOW
	6X235BEA	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - AQUA





## CAT6 FLAT F/UTP SERIES

### CAT6 F/UTP 23 AWG 4 Pair Network Elevator Flat Cable

**Standards :** ANSI/TIA/568.2-D CENELEC EN 50288-5 IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair F-UTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this Elevator Flat cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

#### ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

#### PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Screening	Polyester-aluminum tape (foil face inward) providing 100% coverage.
Outer Jacket	Elastic PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	6xOD (mm)
Storage Temperature	-20 to +80C
Temperature operating range	-20 to +60C
Installation temperature range	0 to +50C
Flame Test	IEC 60332-1

#### Ordering Information

Model No Series	Item Code	Description
TMT-7401	6X235BEB	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLUE
	6X235BEG	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GRAY
	6X235BEK	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLACK
	6X235BEN	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GREEN
	6X235BEO	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - ORANGE
	6X235BER	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - RED
	6X235BEV	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - VIOLET
	6X235BEW	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - WHITE
	6X235BEY	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - YELLOW
	6X235BEA	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - AQUA

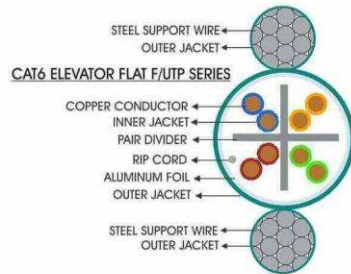

## CAT6 FLAT F/UTP SERIES

### CAT6 F/UTP 23 AWG 4 Pair Network Elevator Flat Cable

**Standards :** ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair F-UTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this Elevator Flat cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

#### ELECTRICAL SPECIFICATIONS

Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

#### PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Screening	Polyester-aluminum tape (foil face inward) providing 100% coverage.
Outer Jacket	Elastic PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	6xOD (mm)
Storage Temperature	-20 to +80C
Temperature operating range	-20 to +60C
Installation temperature range	0 to +50C
Flame Test	IEC 60332-1

#### Ordering Information

Model No Series	Item Code	Description
TMT-7401	6X235BEB	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLUE
	6X235BEG	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GRAY
	6X235BEK	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - BLACK
	6X235BEN	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - GREEN
	6X235BEO	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - ORANGE
	6X235BER	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - RED
	6X235BEV	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - VIOLET
	6X235BEW	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - WHITE
	6X235BEY	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - YELLOW
	6X235BEA	23AWG 4PAIR CAT6 F/UTP LIFT FLAT CABLE 305M - AQUA