DATA PATCH CORD
23AWG SERIES

TMT Global
TECHNOLOGY LTD

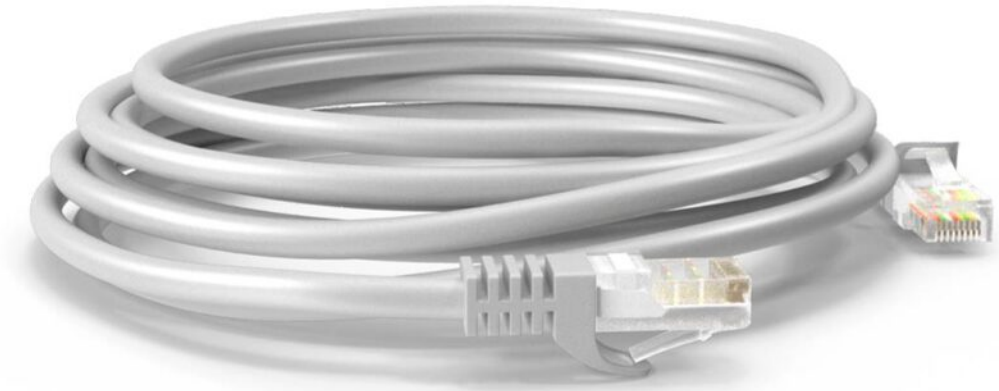

DATA PATCH CORD SERIES

www.tmtglobal.co.uk info@tmtglobal.co.uk

Head Office 120 Baker Street, 3rd Floor, London, England, W1U 6tU, United Kingdom

DATA PATCH CORD
23AWG SERIES

TMT Global
TECHNOLOGY LTD

CAT6A UTP PATCH CORD SERIES

GENERAL SPECIFICATION

Descrip on	0.06CM -100 METER CAT6A UTP PATCH CORD WHITE COLOR
Conductor Resistance	≤5Ω – ≤20Ω
Insula on Resistance	≥10MΩ
Characteris c Impedance	100 — 6 Ohm @ 1-250MHz -1-500 MHz
Contact Resistance	20 m Ohm max.
Resistance unbalance	2% max
Dielectric strength	1000 volts/1 minute min rms
Cable to Plug Tensile Strength	9 Kgf (90N) min
Durability	1200
Temperature Opera ng Range	-25°C to +70°C
Model No	6A3PMW00-100

www.tmtglobal.co.uk info@tmtglobal.co.uk
Head Office 120 Baker Street, 3rd Floor, London, England, W1U 6tU,
United Kingdom