




Products Catalog

<https://tmtglobal.co.uk>


6X332BXX SERIES

CAT6 CABLE

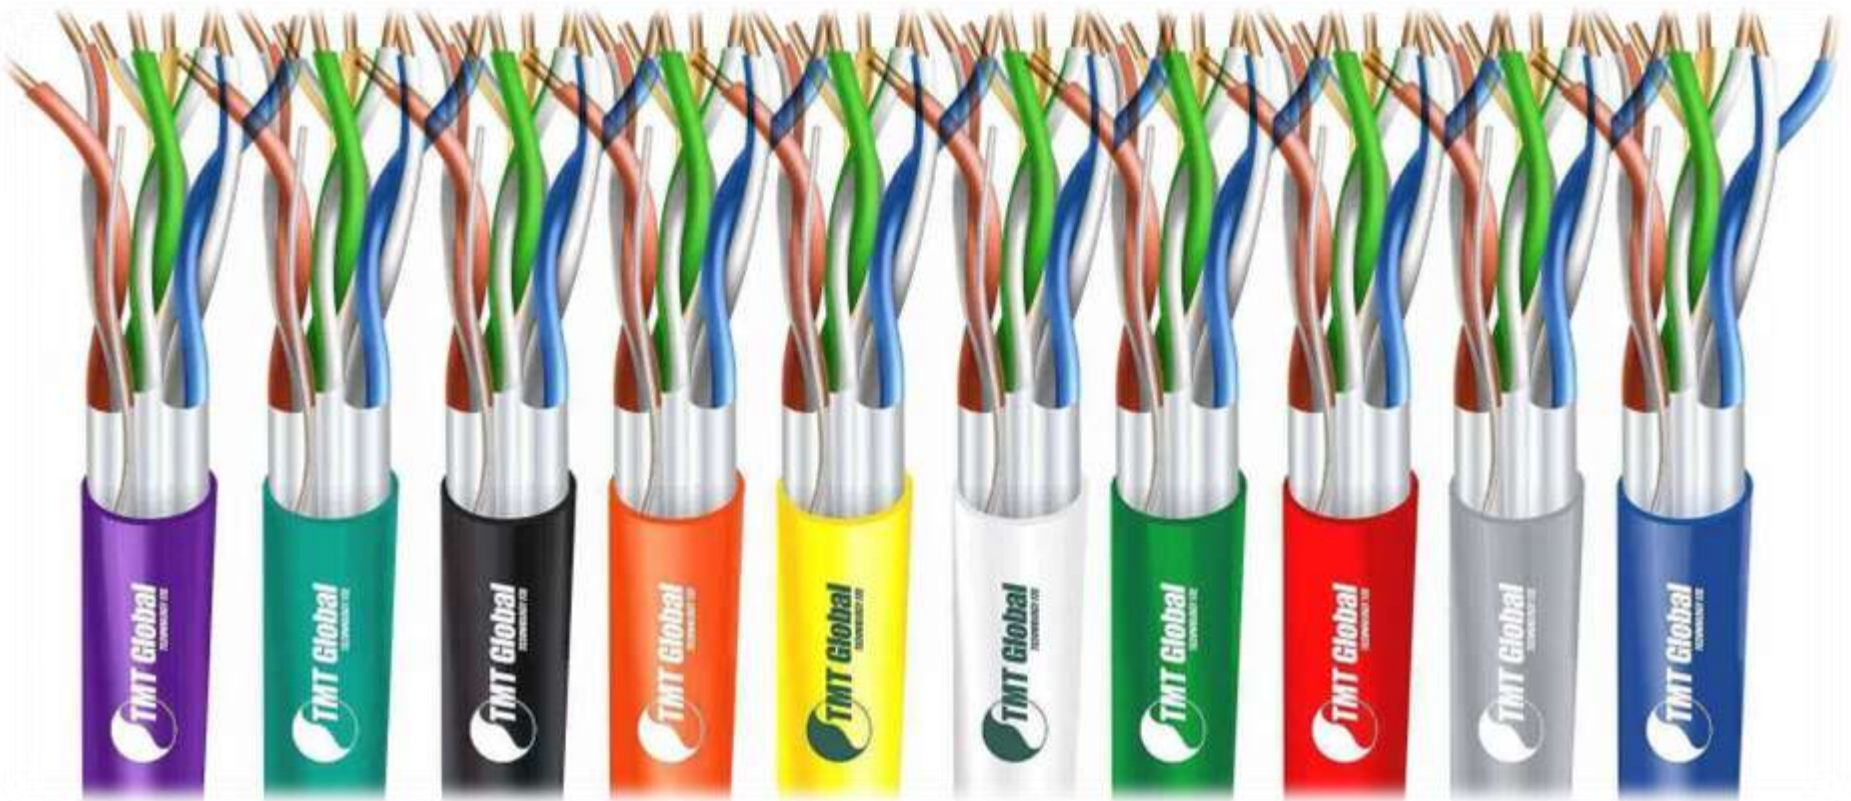

CONTENT

- 3-12 CAT6 U/FTP 23AWG 4 PAIR CABLES 305M -
- 13-13 ORDER INFORMATION

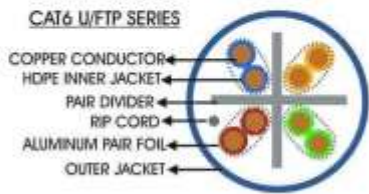

CAT6 U/FTP SERIES

CAT6 U/FTP 23 AWG 4 Pair Network PVC Cable

Standards : ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair U-FTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this PVC cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Coverage	Polyester-aluminum tape
Ground wire	copper conductor
Overall Screening	N
Outer Jacket	PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	8xOD (mm)
Storage Temperature	-20 to +80C
Flame Test	IEC 60332-1

ORDER INFORMATION

Item Code	Description
6X332BPB	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLUE
6X332BPG	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GRAY
6X332BPK	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLACK
6X332BPN	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GREEN
6X332BPO	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - ORANGE
6X332BPR	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - RED
6X332BPV	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - VIOLET
6X332BPW	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - WHITE
6X332BPY	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - YELLOW
6X332BPA	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - AQUA

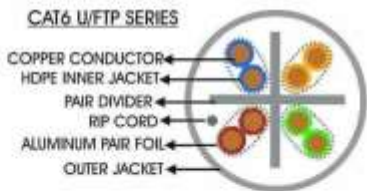

CAT6 U/FTP SERIES

CAT6 U/FTP 23 AWG 4 Pair Network PVC Cable

Standards : ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair U-FTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this PVC cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Coverage	Polyester-aluminum tape
Ground wire	copper conductor
Overall Screening	N
Outer Jacket	PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	8xOD (mm)
Storage Temperature	-20 to +80C
Flame Test	IEC 60332-1

ORDER INFORMATION

Item Code	Description
6X332BPB	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLUE
6X332BPG	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GRAY
6X332BPK	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLACK
6X332BPN	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GREEN
6X332BPO	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - ORANGE
6X332BPR	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - RED
6X332BPV	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - VIOLET
6X332BPW	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - WHITE
6X332BPY	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - YELLOW
6X332BPA	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - AQUA

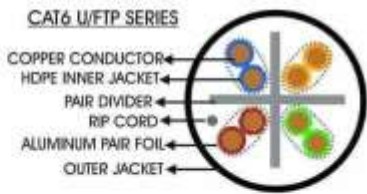

CAT6 U/FTP SERIES

CAT6 U/FTP 23 AWG 4 Pair Network PVC Cable

Standards : ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair U-FTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this PVC cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

ELECTRICAL SPECIFICATIONS

Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Coverage	Polyester-aluminum tape
Ground wire	copper conductor
Overall Screening	N
Outer Jacket	PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	8xOD (mm)
Storage Temperature	-20 to +80C
Flame Test	IEC 60332-1

ORDER INFORMATION

Item Code	Description
6X332BPB	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLUE
6X332BPG	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GRAY
6X332BPK	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLACK
6X332BPN	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GREEN
6X332BPO	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - ORANGE
6X332BPR	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - RED
6X332BPV	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - VIOLET
6X332BPW	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - WHITE
6X332BPY	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - YELLOW
6X332BPA	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - AQUA



CAT6 U/FTP 23 AWG 4 Pair Network PVC Cable

Standards : ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair U-FTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this PVC cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Coverage	Polyester-aluminum tape
Ground wire	copper conductor
Overall Screening	N
Outer Jacket	PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	8xOD (mm)
Storage Temperature	-20 to +80C
Flame Test	IEC 60332-1

ORDER INFORMATION

Item Code	Description
6X332BPB	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLUE
6X332BPG	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GRAY
6X332BPK	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLACK
6X332BPN	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GREEN
6X332BPO	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - ORANGE
6X332BPR	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - RED
6X332BPV	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - VIOLET
6X332BPW	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - WHITE
6X332BPY	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - YELLOW
6X332BPA	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - AQUA

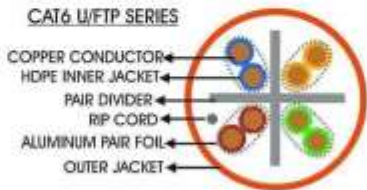

CAT6 U/FTP SERIES

CAT6 U/FTP 23 AWG 4 Pair Network PVC Cable

Standards : ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair U-FTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this PVC cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Coverage	Polyester-aluminum tape
Ground wire	copper conductor
Overall Screening	N
Outer Jacket	PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	8xOD (mm)
Storage Temperature	-20 to +80C
Flame Test	IEC 60332-1

ORDER INFORMATION

Item Code	Description
6X332BPB	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLUE
6X332BPG	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GRAY
6X332BPK	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLACK
6X332BPN	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GREEN
6X332BPO	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - ORANGE
6X332BPR	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - RED
6X332BPV	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - VIOLET
6X332BPW	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - WHITE
6X332BPY	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - YELLOW
6X332BPA	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - AQUA

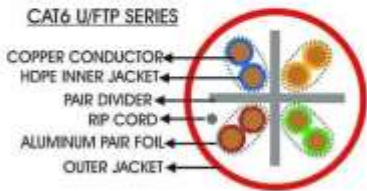

CAT6 U/FTP SERIES

CAT6 U/FTP 23 AWG 4 Pair Network PVC Cable

Standards : ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair U-FTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this PVC cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Coverage	Polyester-aluminum tape
Ground wire	copper conductor
Overall Screening	N
Outer Jacket	PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	8xOD (mm)
Storage Temperature	-20 to +80C
Flame Test	IEC 60332-1

ORDER INFORMATION

Item Code	Description
6X332BPB	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLUE
6X332BPG	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GRAY
6X332BPK	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLACK
6X332BPN	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GREEN
6X332BPO	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - ORANGE
6X332BPR	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - RED
6X332BPV	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - VIOLET
6X332BPW	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - WHITE
6X332BPY	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - YELLOW
6X332BPA	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - AQUA

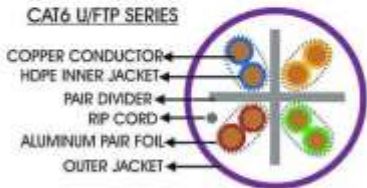

CAT6 U/FTP SERIES

CAT6 U/FTP 23 AWG 4 Pair Network PVC Cable

Standards : ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair U-FTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this PVC cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Coverage	Polyester-aluminum tape
Ground wire	copper conductor
Overall Screening	N
Outer Jacket	PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	8xOD (mm)
Storage Temperature	-20 to +80C
Flame Test	IEC 60332-1

ORDER INFORMATION

Item Code	Description
6X332BPB	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLUE
6X332BPG	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GRAY
6X332BPK	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLACK
6X332BPN	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GREEN
6X332BPO	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - ORANGE
6X332BPR	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - RED
6X332BPV	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - VIOLET
6X332BPW	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - WHITE
6X332BPY	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - YELLOW
6X332BPA	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - AQUA

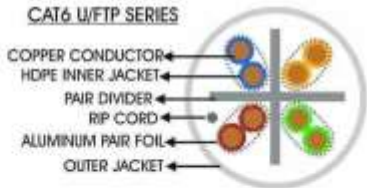

CAT6 U/FTP SERIES

CAT6 U/FTP 23 AWG 4 Pair Network PVC Cable

Standards : ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair U-FTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this PVC cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Coverage	Polyester-aluminum tape
Ground wire	copper conductor
Overall Screening	N
Outer Jacket	PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	8xOD (mm)
Storage Temperature	-20 to +80C
Flame Test	IEC 60332-1

ORDER INFORMATION

Item Code	Description
6X332BPB	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLUE
6X332BPG	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GRAY
6X332BPK	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLACK
6X332BPN	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GREEN
6X332BPO	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - ORANGE
6X332BPR	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - RED
6X332BPV	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - VIOLET
6X332BPW	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - WHITE
6X332BPY	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - YELLOW
6X332BPA	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - AQUA

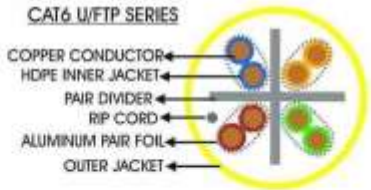

CAT6 U/FTP SERIES

CAT6 U/FTP 23 AWG 4 Pair Network PVC Cable

Standards : ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair U-FTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this PVC cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

ELECTRICAL SPECIFICATIONS

Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Coverage	Polyester-aluminum tape
Ground wire	copper conductor
Overall Screening	N
Outer Jacket	PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	8xOD (mm)
Storage Temperature	-20 to +80C
Flame Test	IEC 60332-1

ORDER INFORMATION

Item Code	Description
6X332BPB	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLUE
6X332BPG	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GRAY
6X332BPK	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLACK
6X332BPN	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GREEN
6X332BPO	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - ORANGE
6X332BPR	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - RED
6X332BPV	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - VIOLET
6X332BPW	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - WHITE
6X332BPY	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - YELLOW
6X332BPA	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - AQUA



CAT6 U/FTP 23 AWG 4 Pair Network PVC Cable

Standards : ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair U-FTP Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this PVC cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

ELECTRICAL SPECIFICATIONS


Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Coverage	Polyester-aluminum tape
Ground wire	copper conductor
Overall Screening	N
Outer Jacket	PVC
Standard Jacket Color	Blue/Gray /Black/Green/Orange/Red/Violet/White/Yellow.
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	8xOD (mm)
Storage Temperature	-20 to +80C
Flame Test	IEC 60332-1

ORDER INFORMATION

Item Code	Description
6X332BPB	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLUE
6X332BPG	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GRAY
6X332BPK	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLACK
6X332BPN	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GREEN
6X332BPO	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - ORANGE
6X332BPR	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - RED
6X332BPV	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - VIOLET
6X332BPW	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - WHITE
6X332BPY	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - YELLOW
6X332BPA	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - AQUA

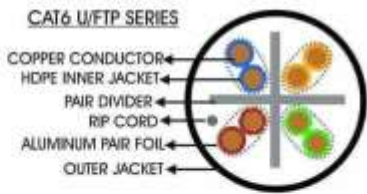

CAT6 U/FTP SERIES

CAT6 U/FTP 23 AWG 4 Pair Network Outdoor Cable

Standards : ANSI/TIA/568.2-D CENELEC EN 50288-5IEC 61156-5 (ISO/IEC-11801 Class -E)

The TMT Global Cat6 23AWG 4 Twisted Pair U-FTP Outdoor Network Cable is a premium choice for those in search of reliable and high-quality structured cabling solutions. Spanning 305 meters, this PVC cable is meticulously manufactured, tested, and complies with stringent standards, including IEC 60332-1-2 and ISO/IEC 11801:2011. Its flexible construction allows for effortless installation in narrow spaces, making it ideal for a variety of applications such as CCTV systems, audio-visual intercoms, public address systems, and smart home automation. This versatile cable not only supports high-performance structured cabling systems but also meets complex specifications across multiple industries, ensuring seamless connectivity and communication for any indoor or outdoor setup.

ELECTRICAL SPECIFICATIONS

Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms
DC Resistance	93 Ohm/Km max.	Velocity of Propagation (NVP)	67-69%
Resistance unbalance	2% max.	Propagation Delay	514 + 36/vf. nS/100m max @ 1-300 MHz
Mutual Capacitance	5.6 nF/100m Max. @ 1 KHz	Propagation Delay Skew	35 nS/100m max @ 1-300 MHz
Cap. Unbalance (wire to ground)	1600 pF/m max. @ 1 KHz.	Insulation Resistance	5000 Mega Ohm•Km min. @ 500 Vdc
Voltage rating	72 Vdc max.	Coupling attenuation	40 dB min @ 30-100 MHz 40-20Log(f/100) @100-300 MHz
Characteristic Impedance	100±6 Ohm @ 1-250 MHz	Dielectric strength	1500 Volts/1 minute min rms

PHYSICAL AND MECHANICAL PROPERTIES

Basic Conductor	Bare copper
Conductor Size	23AWG
Insulation	HDPE
Number of insulated conductors	8, twisted in 4 pairs
Color Code of Pairs	Blue x White/Blue, Orange x White/Orange, Green x White/Green, Brown x White/Brown
Overall Coverage	Polyester-aluminum tape
Ground wire	copper conductor laid in close contact under the shield.
Overall Screening	N
Outer Jacket	Heavy-duty, black, UV-resistant PE compound for outdoor use
Standard Jacket Color	Black
Standard Surface Marking	Includes TMT Global P/N, cable description, Meter mark and Model Number
Pulling force	110 N max.
Short Term Bend Radius	8xOD (mm)
Storage Temperature	-20 to +80C
Flame Test	IEC 60332-1

ORDER INFORMATION

Item Code	Description
6X332BKK	23AWG 4PAIR CAT6 U/FTP CABLE PE OUTDOOR 305M - BLACK

CAT6 U/FTP

CABLES

CAT6 U/FTP CABLES MODEL DETAILS	
PVC SERIES	
6X332BPB	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLUE
6X332BPG	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GRAY
6X332BPK	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - BLACK
6X332BPN	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - GREEN
6X332BPO	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - ORANGE
6X332BPR	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - RED
6X332BPV	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - VIOLET
6X332BPW	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - WHITE
6X332BPY	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - YELLOW
6X332BPA	23AWG 4PAIR CAT6 U/FTP CABLE PVC 305M - AQUA
LSZH SERIES	
6X332BLB	23AWG 4PAIR CAT6 U/FTP CABLE LSZH 305M - BLUE
6X332BLG	23AWG 4PAIR CAT6 U/FTP CABLE LSZH 305M - GRAY
6X332BLK	23AWG 4PAIR CAT6 U/FTP CABLE LSZH 305M - BLACK
6X332BLN	23AWG 4PAIR CAT6 U/FTP CABLE LSZH 305M - GREEN
6X332BLO	23AWG 4PAIR CAT6 U/FTP CABLE LSZH 305M - ORANGE
6X332BLR	23AWG 4PAIR CAT6 U/FTP CABLE LSZH 305M - RED
6X332BLV	23AWG 4PAIR CAT6 U/FTP CABLE LSZH 305M - VIOLET
6X332BLW	23AWG 4PAIR CAT6 U/FTP CABLE LSZH 305M - WHITE
6X332BLY	23AWG 4PAIR CAT6 U/FTP CABLE LSZH 305M - YELLOW
6X332BLA	23AWG 4PAIR CAT6 U/FTP CABLE LSZH 305M - AQUA
OUTDOOR SERIES	
6X332BKK	23AWG 4PAIR CAT6 U/FTP CABLE PE OUTDOOR 305M - BLACK



MIDDLE EAST OFFICE

TMT Global Technology FZE

Saif-zone Sharjah Airport

info@tmtuae.com

www.tmtuae.com



UK OFFICE

TMT Global Technology Ltd. (UK)

 120 Baker Street, 3rd Floor
London, England, W1U 6TU,
United Kingdom

 info@tmtglobal.co.uk

 www.tmtglobal.co.uk

