


FIBER MICRO ODF SERIES



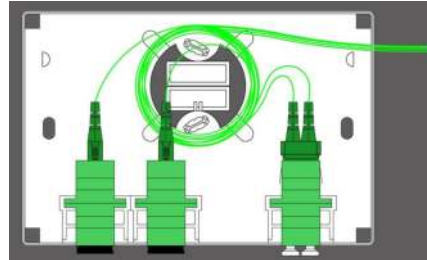

TMT GLOBAL wall mounted Optical Fiber Micro ODF with SC,LC Duplex Adapters

Products description

TMT GLOBAL Fiber Termination Wall Box 4 Core is used to terminate optical installation cables to pigtails at the subscriber's premises. It is mounted on the wall. The cable is fed to the wall outlet from the side. The wall outlet consists of a body and a cover. The body is fixed to the wall with screws and is used for inserting and routing of the optical installation cable and mounting of optical adapters. It also accommodates the splice cassette. A chamber inside the splice cassette allow fixing the splice protection sleeve inside the body. A cable guidance ensures that the cables minimum bending radius is always maintained. A cover protects the contents of the wall outlet and is fixed to the wall outlet without screws just by a simple click-in mechanism. The wall outlet is made of White ABS.

Features:

1. Material: ABS, with a certain fire performance
2. Size: 12*8 (cm)
3. Color: White
4. Radian appearance makes it slinky
5. Suitable for various modules and multimedia interface
6. Embedded surface box, easy to install
7. Support MM or SM fiber connection
8. Suitable for Duplex SC adaptor and Duplex LC adaptor. Applied to the work area cabling subsystem
9. With dust-proof device, to prevent dust.

Technical specifications

Material	ABS
Port type	SC/APC , LC/APC DUPLEX ADAPTERS
Color	White or Gray
Operating temperature	-25°C to +50°C
Flammability	Non-flammable
IP Protection class	IP5x
Dimensions (LxW)	12*8 (cm)
Housing thickness	1.5mm
Weight	80grams

ORDERING INFORMATION

Model no.	Products ID	DESCRIPTION
TMT-3804	TMT-004CPE2	4CORE MICRO ODF WITH LC/APC / SC/APC DUPLEX ADAPTER